

# THRU-BOLT™ PRO




**ICCONS®**  
Serious Connections®

STUD ANCHOR – SIMPLIFIED DESIGN METHOD

TDS | 1007.5

High performance clip creating optimum expansion forces

Available in Clear Zinc and Galvanised

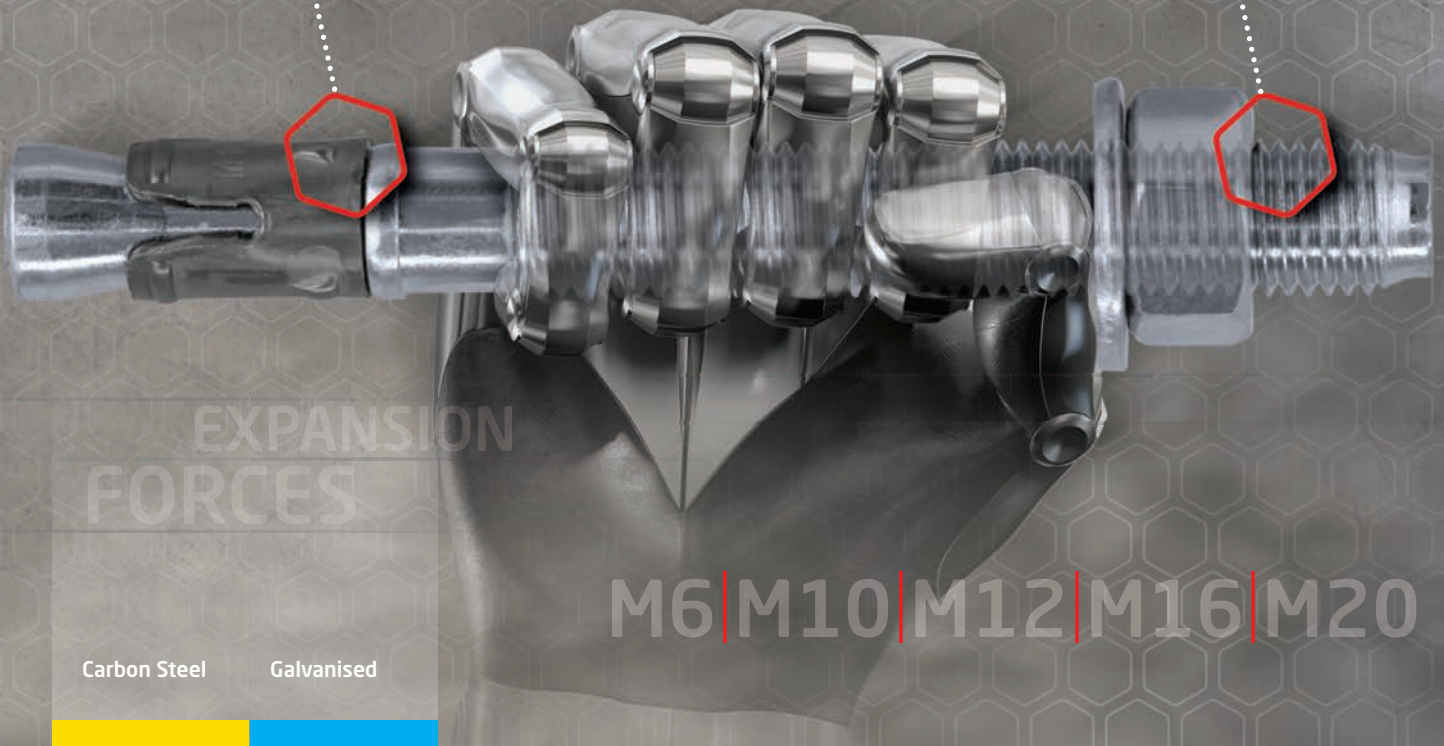

ICCONS® THRU-BOLT™ PRO is a pre-assembled torque controlled mechanical stud anchor, which when tightened draws the tapered end of the bolt into the expander clip expanding it to create expansion forces against the wall of the hole.

- Heavy duty Carbon steel
- Thru fixing for fast installation
- Anchor Diameter = Hole Diameter (eg M12 anchor, 12mm Hole)
- Engineered Clip designed for high loads and prevents anchor rotation

ZINC CLEAR Internal Part No.	GALVANISED External Part No.	Description	Thread Size	Drill Diameter (mm)	Min. Anchor Embedment (mm)	Max. fixture Thickness (mm)	Installation Torque Setting (Nm)	 qty	 qty
<b>TB06085</b>		6 x 85mm	M6	6	50	26	5	100	1000
<b>TB06120</b>		6 x 120mm				61		50	
<b>TB10065</b>	<b>TB10065G</b>	10 x 65mm	M10	10	45	10	25	25	250
<b>TB12080</b>	<b>TB12080G</b>	12 x 80mm	M12	12	60	5	45	25	250
<b>TB16105</b>	<b>TB16105G</b>	16 x 105mm	M16	16	80	5	110	25	100
<b>TB20125</b>	<b>TB20125G</b>	20 x 125mm	M20	20	100	5	180	10	50

**Note:** Galvanised parts are coated using a Sherardised process.

Information contained in this technical document is based on testing by the manufacturer and should be reviewed and approved by a design professional responsible for the given application. Technical data contained in this document **does not** comply with AS5216. For safety critical fastening applications designed in accordance with AS5216, please refer to the ICCONS® website for a complete suite of compliant post-installed chemical and mechanical anchoring products.



## Material Specifications Thru-Bolt™ PRO Stud Anchor



Anchor Part	Zinc Plated	Galvanised
Expander Clip	Carbon Steel	A4 series S/S
Washer	AISI1010	AISI1010
Nut	AISI1010	AISI1010
Anchor bolt	Carbon Steel	Carbon Steel
Plating	Electroplated Zinc Coating thickness 5 microns (min.)	Sherardised Coating thickness ≥40 microns (min.)

Anchor Size (mm)	Drill Size (mm)	Anchor Embedment Depth (mm)	RECOMMENDED LOADS					
			N <sub>rec</sub>			V <sub>rec</sub>		
			ZINC CLEAR & GALVANISED TENSION			ZINC CLEAR & GALVANISED SHEAR		
			20MPa (kN)	32MPa (kN)	40MPa (kN)	20MPa (kN)	32MPa (kN)	40MPa (kN)
6	6	50	2.2	2.9	3.4	2.1	2.1	2.1
10	10	45	3.2	4.1	4.5	3.2	4.1	4.5
12	12	60	4.9	6.2	6.9	4.9	6.2	6.9
16	16	80	8.4	10.7	11.9	16.3	16.3	16.3
20	20	100	12.2	15.5	17.3	24.6	25.5	25.5

**Note:** Load capacities above incorporate a safety factor of 3 for concrete and 2.5 for steel. All loads are representative of a single anchor installed remote from an edge. The above information has been derived from laboratory test results using NATA calibrated equipment.


**Limit State Design** - Multiply the above loads by 1.8 (Concrete) and 2 (Steel) to determine the Limit State Design capacities.

STEEL GOVERNING


## INSTALLATION




**1. Drilling**  
Use drill in hammer mode. Drill to specified diameter and depth for the required size.



**2. Blow and clean**  
Clean the drill hole completely of dust and debris. Use blow pump and brush

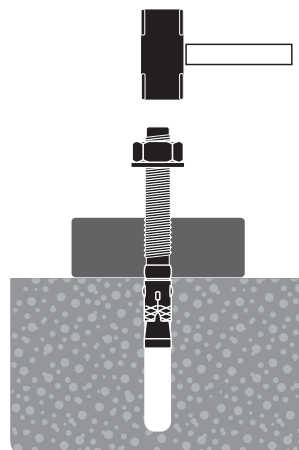

**3. Install**  
Insert the anchor in the hole to the specified embedment depth. Use hammer if required; DOMTA tool can be used alternatively. The installation may be done through the fixture baseplate.

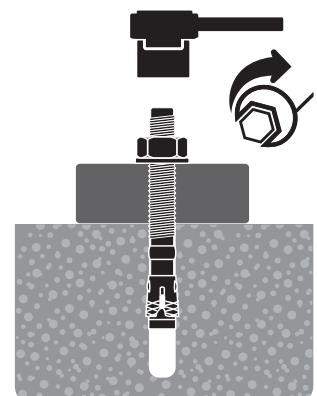

**4. Apply torque**  
Apply nominal installation torque using a torque wrench. Once installed verification of the total length of the anchor can be made through the letter on the head.

## Combined Tension & Shear Loading

For combined tension and shear load applications the following equations shall be satisfied;


$$N_{\text{applied}} / N_{\text{rec}} \leq 1 \quad V_{\text{applied}} / V_{\text{rec}} \leq 1 \quad (N_{\text{applied}} / N_{\text{rec}}) + (V_{\text{applied}} / V_{\text{rec}}) \leq 1.2$$

Where:

- N<sub>applied</sub> = Applied Tension Load
- N<sub>rec</sub> = Recommended Tension Load
- V<sub>applied</sub> = Applied Shear Load
- V<sub>rec</sub> = Recommended Shear Load

## Base Material Thickness

Base material thickness should be 1.5 x h<sub>embed</sub>, or a minimum of 75mm, always use the greater of the two values.






When anchor spacing or edge distances are less than critical distances, Recommended Working Load capacities must be multiplied by the appropriate reduction factors. Linear interpolation is allowed for intermediate anchor spacing and edge distances between critical and minimum distances. If an anchor/anchor group is affected by multiple reduced spacing and edge distances, the spacing and edge reduction factors must be multiplied together to give a total effect on the anchor / anchor group performance.

### Spacing Reduction Factors ( $S_t + S_s$ ) – tension and shear


	d (mm)	6	10	12	16	20
	$h_{embed}$	50	45	60	80	100
	$S_{cr}$ (mm)	100	90	120	160	200
	$S_{min}$ (mm)	50	45	60	80	100
Spacing (S) mm	45		0.50			
	50	0.50	0.56			
	55	0.55	0.61			
	60	0.60	0.67	0.50		
	70	0.70	0.78	0.58		
	80	0.80	0.89	0.67	0.50	
	90	0.90	1.00	0.75	0.56	
	100	1.00		0.83	0.63	0.50
	110			0.92	0.69	0.55
	120			1.00	0.75	0.60
	140				0.88	0.70
	160				1.00	0.80
	180					0.90
200					1.00	



**Note:** To achieve 100% anchor capacity, critical spacing ( $S_{cr}$ ) is equal to  $2 \times h_{embed}$ . Minimum spacing ( $S_{min}$ ) is equal to  $h_{embed}$  at which the anchor achieves 50% of capacity.

### Edge Distance Reduction Factor ( $C_t$ ) – tension


	d (mm)	6	10	12	16	20
	$C_{cr}$ (mm)	72	120	144	192	240
	$C_{min}$ (mm)	30	50	60	80	100
Edge Distance (C) mm	30	0.75				
	40	0.81				
	50	0.87	0.75			
	60	0.93	0.79	0.75		
	72	1.00	0.83	0.79		
	80		0.86	0.81	0.75	
	96		0.91	0.86	0.79	
	100		0.93	0.87	0.80	0.75
	120		1.00	0.93	0.84	0.79
	144			1.00	0.89	0.83
	192				1.00	0.91
	240					1.00



**Note:** To achieve 100% anchor capacity, critical edge distance ( $C_{cr}$ ) is equal to  $12d$  ( $12 \times$  anchor diameter). Minimum edge distance ( $C_{min}$ ) is equal to  $(5d)$  at which the anchor achieves 75% of capacity.

### Edge Distance Reduction Factor ( $C_s$ ) – shear

	d (mm)	6	10	12	16	20
	$C_{cr}$ (mm)	72	120	144	192	240
	$C_{min}$ (mm)	30	50	60	80	100
Edge Distance (C) mm	30	0.35				
	40	0.50				
	50	0.66	0.35			
	60	0.81	0.44	0.35		
	72	1.00	0.55	0.44		
	80	1.00	0.63	0.50	0.35	
	96		0.78	0.63	0.44	
	100		0.81	0.66	0.47	0.35
	120		1.00	0.81	0.58	0.44
	144		1.00	1.00	0.72	0.55
	192			1.00	1.00	0.78
	240				1.00	1.00



**Note:** To achieve 100% anchor capacity, critical edge distance ( $C_{cr}$ ) is equal to  $12d$  ( $12 \times$  anchor diameter). Minimum edge distance ( $C_{min}$ ) is equal to  $(5d)$  at which the anchor achieves 35% of capacity.



## ICCONS® PTY LTD

**VICTORIA - HEAD OFFICE**  
383 Frankston Dandenong Rd,  
Dandenong South,  
Vic, 3175  
P: **03 9706 4344**

**NSW Branch**  
Unit A, 17 Seddon Street,  
Bankstown,  
New South Wales, 2200  
P: **02 9791 6869**

**QLD Branch**  
42-44 Nealdon Dr  
Meadowbrook,  
Queensland, 4131  
P: **07 3200 6455**

**S.A Branch**  
29-31 Weaver Street,  
Edwardstown,  
South Australia 5039  
P: **08 8234 5535**

**W.A. Branch**  
90 Christable Way,  
Landsdale,  
Western Australia, 6065  
P: **08 6305 0008**

**NORTHERN TERRITORY**  
Unit 1, 14 Menmuir Street,  
Winnellie,  
Northern Territory 0820  
P: **08 8947 2758**

## NEW ZEALAND

**Sesto Fasteners**  
5E Piermark Road,  
Albany, Auckland,  
New Zealand 0630  
P: **+64 9415 8564**  
E: [sestofasteners@gmail.com](mailto:sestofasteners@gmail.com)

## THAILAND

ICCONS (Thailand) Co. Ltd.  
55 Phetkasem 62/3, Bangkhuae,  
Bangkok 0160  
P: **+ 66 2 801 0764**  
F: **+ 66 2 801 0764**  
M: **+ 66 8 1 710 8745**  
E: [icconsthailand@hotmail.com](mailto:icconsthailand@hotmail.com)